


## Aerial Terminal

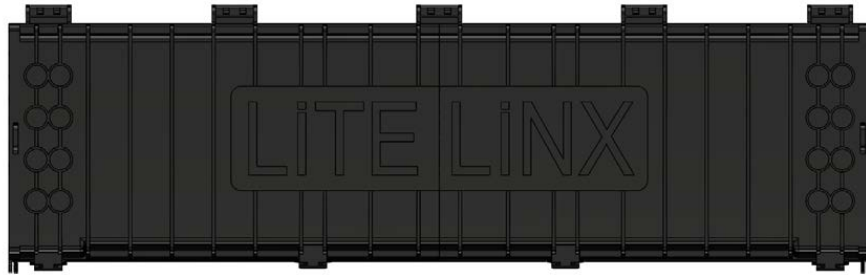

Introducing our Aerial Terminal, meticulously designed for aerial fiber access networks, offering a cost-effective solution tailored for optical access networks. The innovative 33-inch terminal ensures environmental protection and facilitates swift incremental connection of subscribers' drop cables. Equipped with a sealed enclosure resistant to environmental elements, it features quick-release clamps for effortless re-entry.


Installation is a breeze with included aerial hanging brackets, supporting up to 12 Single-Fiber Drop Cable Assembly connector ports. The terminal boasts three express ports per end cap, accommodating Flatdrop or Pushable Duct Round STUBBED cable options. This FastConnect Terminal integrates options for integrated splitters, ensuring flexibility in deployment scenarios.

User-friendly for both installation and operation, our Aerial Terminal prioritizes fiber protection, continuity, and efficient slack storage with up to 12 feet of capacity. Offering versatility with a maximum fiber cable capacity of 72 loose tubes or 216 ribbons, our Aerial Terminal is the optimal choice for seamless and reliable aerial fiber installations.

## Highlights:



- Factory sealed enclosure provides resistance to environment
- FastConnect Terminal
- Flatdrop or Pushable Duct Round STUBBED cable options
- -40°C to 80°C Rated
- Integrated Splitters options
- Friendly user for installation and operation
- Aerial hanging brackets included
- Fiber protection and continuity
- Quick release clamps
- Up to 12 feet of slack storage
- Maximum fiber cable capacity is 72 loose tube or 216 ribbon

## Specifications:

Working Temperature	-40°C~80°C	
Distribution cable per end		1xØ13mm
		1xØ16mm
		1xØ18mm
Number of Drop Adapters per end	2, 3, 4 or 6	
Pigtail class	Single fiber (900 µm)	
Max number of trays	3	
Max splice fiber capacity	144 Single Fiber / 216 Mass Fusion	
Number of Pigtails	Up to 12	
Connector Type	Fast Connect SC/APC	
Dimensions	826 mm x 257.1 mm x 152.4 mm	

## Box Contents:

- LiteLinx MST Terminal
- Mounting Hardware

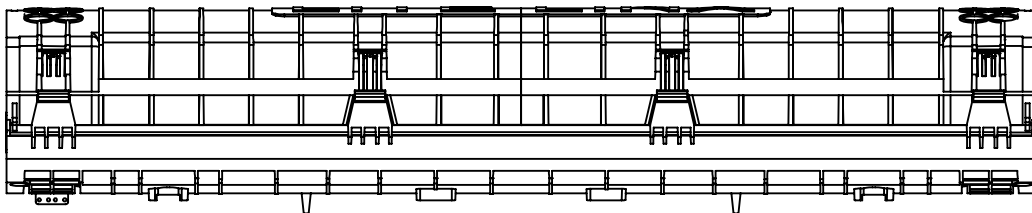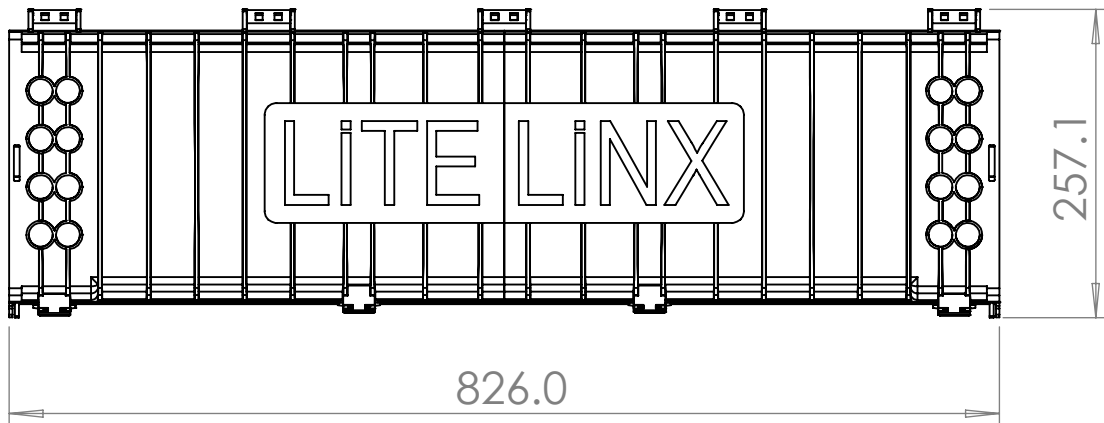

\*

